


# Touchtek Gen 4

## System Specs:


- Six 20A outputs
- <.5 mA quiescent current draw
- Programmable outputs
- Interlock programmings
- Audible/lighting control options
- Built in warnings/alerts

## Features:

- Operational temp: -40°C to 80°C
- Dustproof
- Operating voltage: 8 - 16VDC
- On state current consumption: 500mA (approx.)
- Protection
  - Reverse polarity
  - Backfeed
  - Under/over voltage

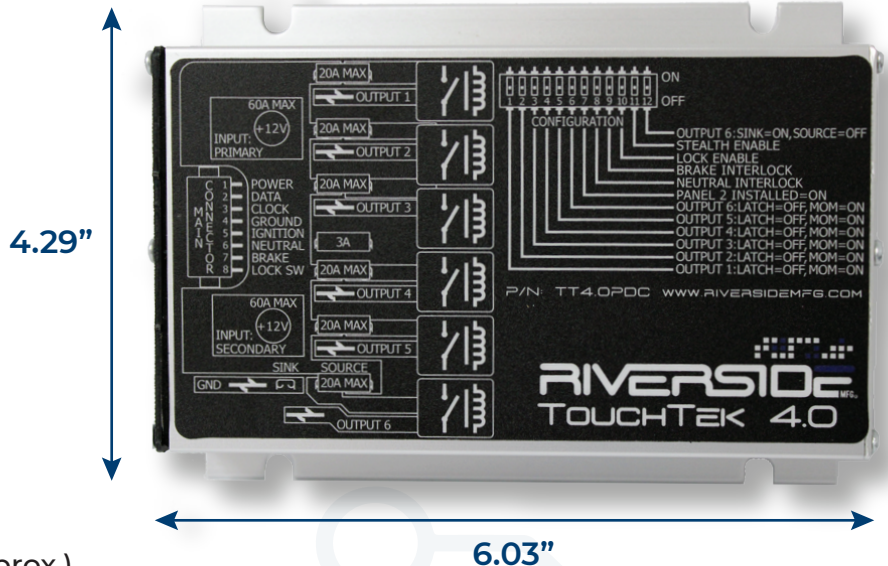

## Touchtek Gen 4

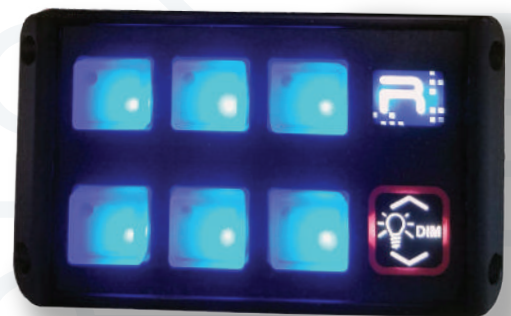

The TouchTek Gen 4 consists of a six-button control panel and an I/O control module. It provides up to six 20A (fuse protected) independent outputs via dedicated buttons with an option to add a second panel in parallel for dual panel control of outputs. TTG4 has audio and visual button press indication provided by a speaker and button color.

There are options to enable and disable both the speaker and panel light along with brightness adjustment. The outputs can be programmable to latched or for momentary operation. There are built in warnings and alerts to notify the user of potential error conditions within their system. Also, inputs allow for interlock programming (ignition, neutral, brake and gun-lock timer).